



MARKSCHEME

May 2012

PHYSICS

Standard Level

Paper 2

*This markscheme is **confidential** and for the exclusive use of examiners in this examination session.*

*It is the property of the International Baccalaureate and must **not** be reproduced or distributed to any other person without the authorization of IB Assessment Centre.*

General Marking Instructions

Assistant Examiners (AEs) will be contacted by their team leader (TL) through Scoris™, by e-mail or telephone – if through Scoris™ or by e-mail, please reply to confirm that you have downloaded the markscheme from IBIS. The purpose of this initial contact is to allow AEs to raise any queries they have regarding the markscheme and its interpretation. AEs should contact their team leader through Scoris™ or by e-mail at any time if they have any problems/queries during the marking process.

If you have any queries on **administration** please contact:

Barry Evans
Subject Operations
IB Assessment Centre
Peterson House
Malthouse Avenue
Cardiff Gate
Cardiff CF23 8GL
GREAT BRITAIN

Tel: +(44) 29 2054 7777

Fax: +(44) 29 2054 7778

E-mail: barry.evans@ibo.org

1. Follow the markscheme provided, award only whole marks and mark only in **RED**.
2. Make sure that the question you are about to mark is highlighted in the mark panel on the right-hand side of the screen.
3. Where a mark is awarded, a tick/check (✓) **must** be placed in the text at the **precise point** where it becomes clear that the candidate deserves the mark. **One tick to be shown for each mark awarded.**
4. Sometimes, careful consideration is required to decide whether or not to award a mark. In these cases use Scoris™ annotations to support your decision. You are encouraged to write comments where it helps clarity, especially for re-marking purposes. Use a text box for these additional comments. It should be remembered that the script may be returned to the candidate.
5. Personal codes/notations are unacceptable.
6. Where an answer to a part question is worth no marks but the candidate has attempted the part question, enter a zero in the mark panel on the right-hand side of the screen. Where an answer to a part question is worth no marks because the candidate has not attempted the part question, enter an “NR” in the mark panel on the right-hand side of the screen.
7. If a candidate has attempted more than the required number of questions within a paper or section of a paper, mark all the answers. Scoris™ will only award the highest mark or marks in line with the rubric.
8. Ensure that you have viewed **every** page including any additional sheets. Please ensure that you stamp “seen” on any page that contains no other annotation.
9. Mark positively. Give candidates credit for what they have achieved and for what they have got correct, rather than penalizing them for what they have got wrong. However, a mark should not be awarded where there is contradiction within an answer. Make a comment to this effect using a text box or the “CON” stamp.

Subject Details: Physics SL Paper 2 Markscheme

Mark Allocation

Candidates are required to answer **ALL** questions in Section A [**25 marks**] and **ONE** question in Section B [**25 marks**]. Maximum total=[**50 marks**].

1. A markscheme often has more marking points than the total allows. This is intentional. Do **not** award more than the maximum marks allowed for part of a question.
2. Each marking point has a separate line and the end is shown by means of a semicolon (;).
3. An alternative answer or wording is indicated in the markscheme by a slash (/). Either wording can be accepted.
4. Words in brackets () in the markscheme are not necessary to gain the mark.
5. Words that are underlined are essential for the mark.
6. The order of marking points does not have to be as in the markscheme, unless stated otherwise.
7. If the candidate's answer has the same "meaning" or can be clearly interpreted as being of equivalent significance, detail and validity as that in the markscheme then award the mark. Where this point is considered to be particularly relevant in a question it is emphasized by **OWTTE** (or words to that effect).
8. Remember that many candidates are writing in a second language. Effective communication is more important than grammatical accuracy.
9. Occasionally, a part of a question may require an answer that is required for subsequent marking points. If an error is made in the first marking point then it should be penalized. However, if the incorrect answer is used correctly in subsequent marking points then **follow through** marks should be awarded when marking. Indicate this by adding **ECF** (error carried forward) on the script.
10. Do not penalize candidates for errors in units or significant figures, unless it is specifically referred to in the markscheme.

SECTION A

A1. (a) (i) any straight line that goes through all error bars; [1]

(ii) line does not go through origin / (0,0) / zero; [1]

(b) (i) $\pm 0.35 \text{ s}^2$; (accept answers in range 0.3 to 0.4) [1]

(ii) $\frac{\Delta(t^2)}{t^2} = 2 \frac{\Delta t}{t}$;

$$\Delta(t^2) = 0.8^2 \times 2 \times \frac{0.1}{0.8};$$

$$\Delta(t^2) = 0.16 \approx 0.2 \text{ s}^2;$$

answer given to one significant figure;

or

percentage uncertainty in $t = \frac{0.1}{0.8} \times 100 = 12.5\%$;


percentage uncertainty in $t^2 = 25\%$;

absolute uncertainty in $t = 0.25 \times 0.8^2 = 0.16 \approx 0.2 \text{ s}^2$;

answer given to one significant figure;

[4]

(iii)

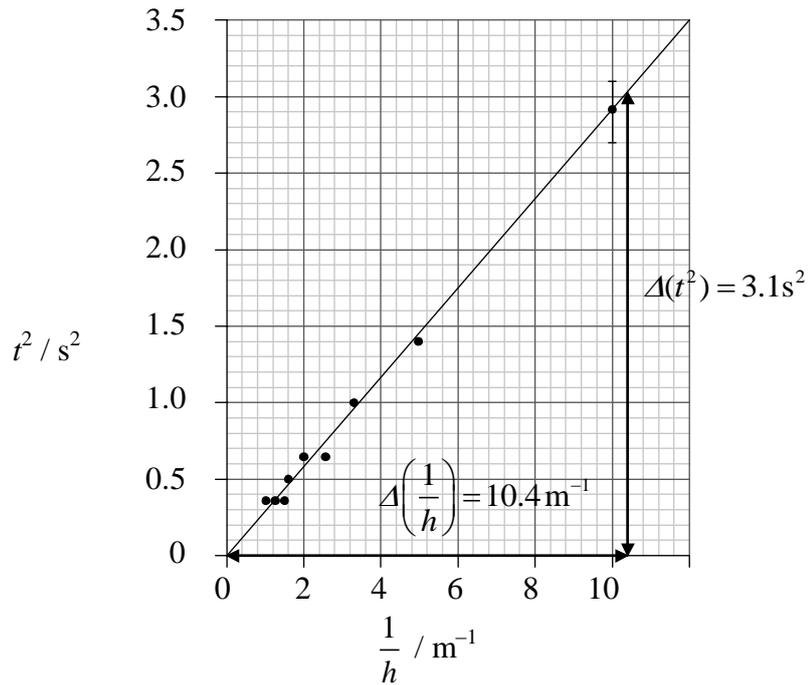

use of gradient triangle over at least half of line;
 value of gradient = 0.30; (accept answers in range 0.28 to 0.32)
 = k^2 to give $k = 0.55$; (accept answers in range 0.53 to 0.57)

or

equation of line is $t^2 = \frac{k^2}{h}$;

data values for a point on the line selected;

values substituted into equation to get $k = 0.55$; (accept answers in range 0.53 to 0.57)

[3]

Award [2] for answers that use a data point not on the best fit line.

(iv) $\text{m}^{\frac{1}{2}} \text{s}$;

[1]

- A2.** (a) intensity of the Sun’s radiation at the Earth’s orbit = $\frac{P}{4\pi d^2}$;
 fraction absorbed by the Earth = $(1-\alpha)$;
 the surface area of the disc (absorbing the radiation) = πr^2 ; [3]
Look for statements that correctly describe each term.
- (b) (i) correct substitution;
 to get $T = 250$ (K); [2]
- (ii) greenhouse gases in the atmosphere absorb some of the energy radiated by
 the Earth;
 and radiate some of it back to the surface of the Earth; [2]
- A3.** (a) the energy required to change the temperature (of a substance) by $1\text{K}/^\circ\text{C}$ /unit
 degree;
 of mass 1 kg / per unit mass; [2]
- (b) (i) use of $mc\Delta T$;
 $0.58 \times c \times [180 - 44] = 0.35 \times 4200 \times [44 - 20]$;
 $c = 447 \text{J kg}^{-1} \text{K}^{-1} \approx 450 \text{J kg}^{-1} \text{K}^{-1}$; [3]
- (ii) energy would be given off to surroundings/environment / energy would be
 absorbed by container / energy would be given off through vaporization of
 water;
 hence final temperature would be less;
 hence measured value of (specific) heat capacity (of iron) would be higher; [2 max]

SECTION B


B1. Part 1 Wind power

(a) kinetic energy of wind transferred to (rotational) kinetic energy of turbine/blades;
 kinetic energy changed to electrical energy in generator/dynamo; [2]
Generator/dynamo must be mentioned.

(b) (i) volume of cylinder of air passing through blades per second = $v\pi r^2$;
 mass of air incident per second = $\rho v\pi r^2$;
 kinetic energy per second = $\frac{1}{2}mv^2$;
 leading to $\frac{1}{2}\pi\rho r^2v^3$ [3]
Award [3] for answers that combine one or more steps.

(ii) the speed of the air/wind cannot drop to zero;
 wind turbulence / frictional losses in turbine/any moving part / resistive
 heating in wires; [2]

(c) kinetic energy per second of air entering turbine = $\frac{1}{2}\pi \times 1.1 \times 25^2 \times 9.8^3 = 1.016 \times 10^6$;
 kinetic energy per second of air leaving turbine = $\frac{1}{2}\pi \times 2.2 \times 25^2 \times 4.6^3 = 2.102 \times 10^5$;
 power extracted = $1.0 \times 10^6 - 2.1 \times 10^5 = 8.062 \times 10^5 \approx 8.1 \times 10^5$ W; [3]

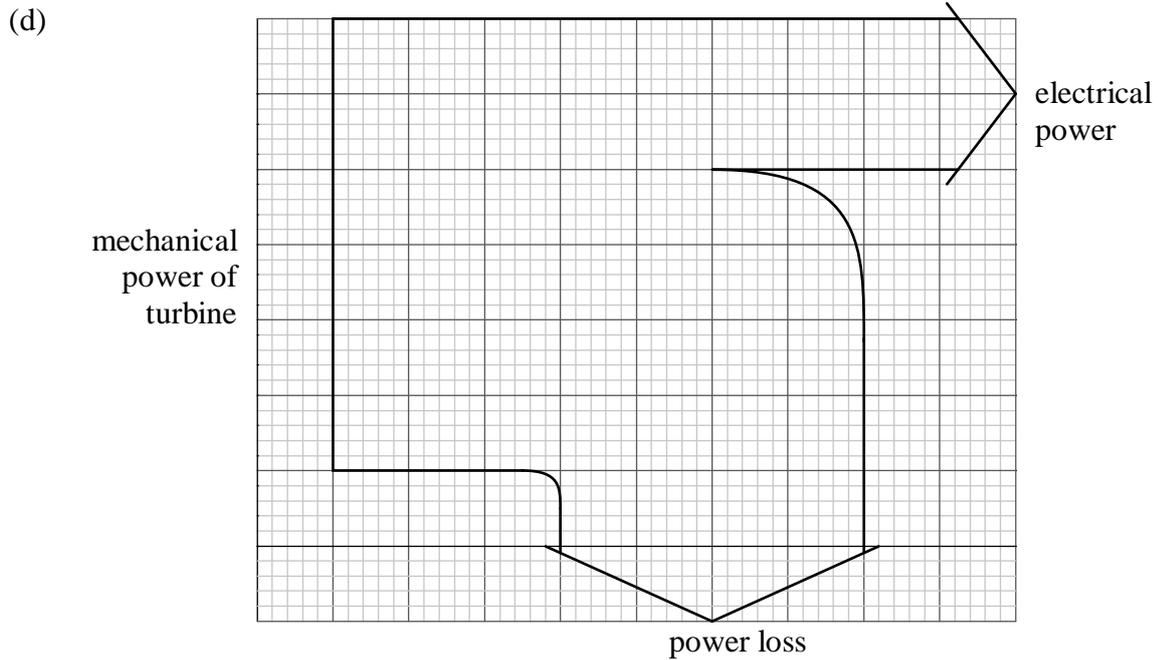

correct shape of diagram (allow multiple arrows if power loss split into different components);
relative width of arrows correct;
labels correct;

[3]

(e) *Advantage:*
wind is renewable so no resources used up / wind is free / no chemical pollution / no carbon dioxide emission / does not contribute to greenhouse effect / is “scalable” i.e. many sizes of turbine possible;

Disadvantage:
expensive initial cost / large land area needed / wind not constant / effect on movement of birds / aesthetically unpleasant / noise pollution / high maintenance costs / best locations far from population centres / low energy density;

[2]

Accept any other suitable advantage or disadvantage.


Part 2 Radioactive decay

- (a) emission of (alpha/beta/gamma) particles/photons/electromagnetic radiation;
 nucleus becomes more (energetically) stable;
 constant probability of decay (per unit time);
 is random process;
 activity/number of unstable nuclei in sample reduces by half over constant time intervals/exponentially;
 not affected by temperature/environment / is spontaneous process; **[3 max]**
- (b) (i) 93; **[1]**
- (ii) mass of products is less than mass of reactants / there is a mass defect;
 mass is converted into energy (according to equation $E = mc^2$); **[2]**
- (iii) the (minimum) energy required to (completely) separate the nucleons in a nucleus / the energy released when a nucleus is assembled from its constituent nucleons; **[1]**
- (iv) calculation of binding energies as shown below;
 americium-241 = $241 \times 7.54 = 1817.14$ MeV
 neptunium-237 = $237 \times 7.58 = 1796.46$ MeV
 helium-4 = $4 \times 7.07 = 28.28$ MeV
 energy released is the difference of binding energies;
 and so equals 7.60 MeV; **[3]**
Award [2 max] for an answer that multiplies by the number of neutrons or number of protons.
Ignore any negative sign in answer.

B2. Part 1 Simple harmonic motion and the superposition of waves


- (a) the force/acceleration is proportional to the displacement from the equilibrium position/centre;
the force/acceleration is directed towards the equilibrium position/centre /
the force/acceleration is in the opposite direction to the displacement; [2]

- (b) (i) straight line through the origin;
with negative gradient; [2]

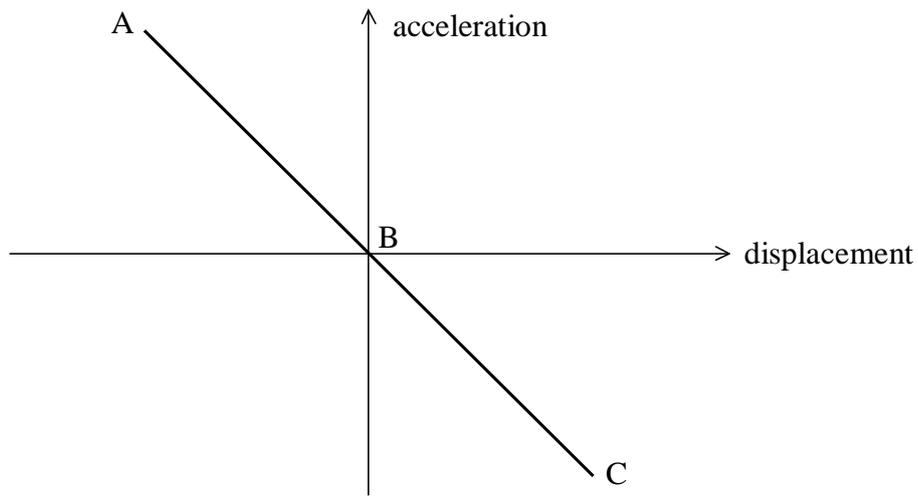

- (ii) all three labels correct; [1]

- (c) (i) positive sine graph;
drawn correctly for one period; [2]

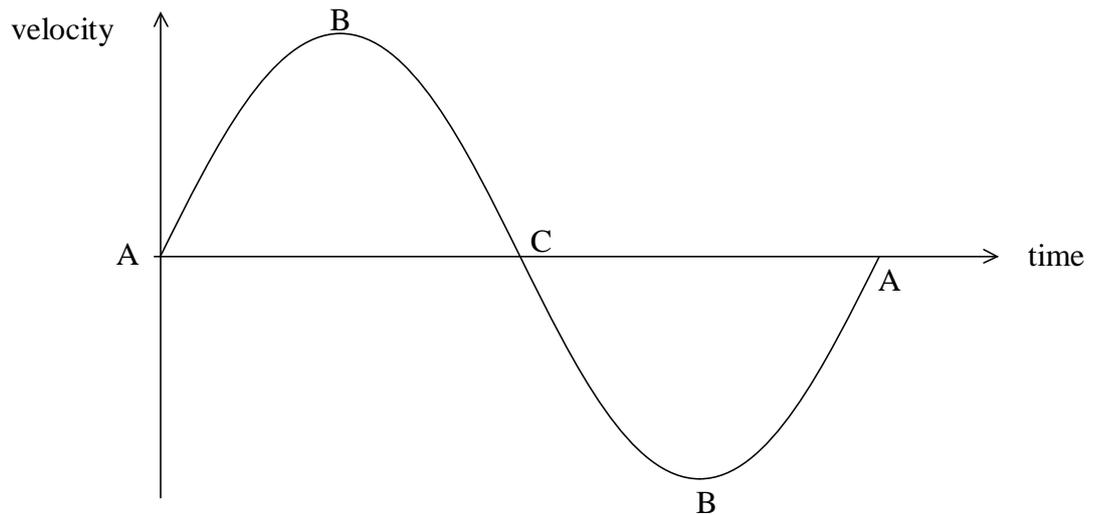

- (ii) all three labels correct; [1]
Accept either of the As and either of the Bs.
Accept either B if shown on the time axis in the correct position.

(d) $\omega = \frac{2\pi}{T} = \frac{2\pi}{0.20} = 31.42 \approx 31 \text{ rads}^{-1};$

$v_{\text{max}} = \omega x_0 = 31.42 \times 0.040;$


$v_{\text{max}} = 1.257 \approx 1.3 \text{ ms}^{-1};$

[3]

(e) (i) if two or more waves overlap/meet/pass through the same point;
the resultant displacement at any point is found by adding the
displacements produced by each individual wave;

[2]

(ii) 0.20 s later, wave X will have crests at 5.0, 3.0 and 1.0 m, wave Y will
have crests at 5.0 and 9.0 m / each wave will have moved forward by
2.0 m in 0.20 s / wave profiles for 0.20 s later drawn on diagram;

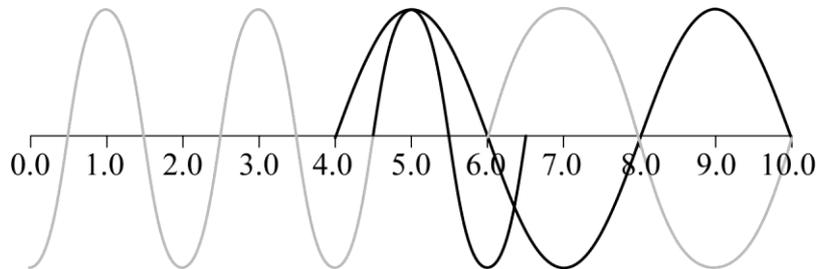

maximum displacement where two crests meet, *i.e.* at 5.0 m;

[2]


Part 2 Gravitational fields

- (a) there is an attractive force;
 between any two point/small masses;
 proportional to the product of their masses;
 and inversely proportional to the square of their separation;
Accept formula with all terms defined. [3 max]

- (b) use of $g = \frac{F}{m}$ and $F = \frac{GmM}{R^2}$;
 evidence of substitution/manipulation;
 to get $g = \frac{GM}{R^2}$ [2]

- (c) $\frac{g_M}{g_E} = \frac{\frac{M_M}{R_M^2}}{\frac{M_E}{R_E^2}} \Rightarrow \frac{M_M}{M_E} = \frac{g_M}{g_E} \times \left[\frac{R_M}{R_E} \right]^2$;
 $M_M (= 0.38 \times 0.53^2 M_E) = 0.11 M_E$; [2]

- (d) (i) radial field with arrows pointing inwards; [1]

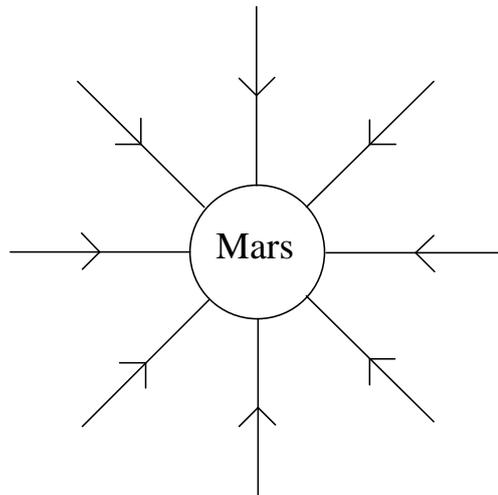

- (ii) field between A and B is not equal to field at surface;
 acceleration is not constant between these two points; [2]

B3. Part 1 A collision

- (a) distance between surfaces of blocks = $0.900 - 0.050 = 0.850$ m;
 relative speed between blocks = 0.36 ms^{-1} ;

$$\text{time} = \frac{\text{distance}}{\text{speed}} = \frac{0.850}{0.36} = 2.4 \text{ s};$$

or

blocks moving at same speed so meet at mid-point;
 distance travelled by block = $0.450 - 0.025 = 0.425$ m;

$$\text{time} = \frac{\text{distance}}{\text{speed}} = \frac{0.425}{0.18} = 2.4 \text{ s}; \quad [3]$$

Award [3] for bald correct answer.

Award [2 max] if distance of 0.90 m or 0.45 m used to get 2.5 s.

- (b) (i) the collision is inelastic;
 because kinetic energy is not conserved (although momentum is); [2]

(ii) initial $E_K = \frac{1}{2} \times 0.17 \times 0.18^2 = 0.002754 \text{ J};$
 final $E_K = 0.80 \times 0.002754 = 0.0022032 \text{ J};$
 final speed = $\sqrt{\frac{2 \times 0.0022032}{0.17}};$
 $= 0.16 \text{ ms}^{-1}$

or

$$0.8 \times \text{initial } E_K = \text{final } E_K;$$


$$0.8 \times \frac{1}{2} \times 0.17 \times 0.18^2 = \frac{1}{2} \times 0.17 \times v^2;$$

$$v = \sqrt{0.8 \times 0.18^2};$$

$$= 0.16 \text{ ms}^{-1} \quad [3]$$

- (c) (i) if object A exerts a force on object B, then object B (simultaneously) exerts an equal and opposite force on object A / every action has an equal and opposite reaction / *OWTTE*; [1]

- (ii) arrows of equal length; (*judge by eye*)
 acting through centre of blocks;
 correct labelling consistent with correct direction; [3]

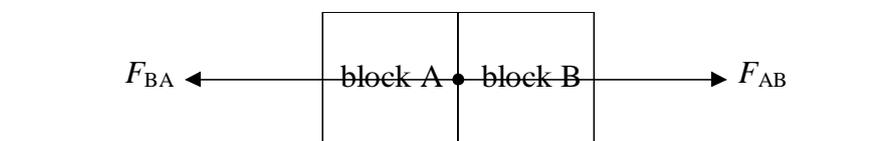

(iii) $\Delta v = 0.16 - (-0.18) = 0.34 \text{ ms}^{-1}$;
 $a = \frac{\Delta v}{\Delta t} = \frac{0.34}{0.070} = 4.857 \text{ ms}^{-2}$;
 $F = ma = 0.17 \times 4.857 = 0.83 \text{ N}$;

or

$\Delta v = 0.16 - (-0.18) = 0.34 \text{ ms}^{-1}$;
 impulse = $F \Delta t = m \Delta v \Rightarrow F = \frac{0.17 \times 0.34}{0.07}$;
 $F = 0.83 \text{ N}$;

[3]

Part 2 Electric current and resistance

(a) (i) $\frac{\text{potential difference across the component}}{\text{current in the component}}$; [1]

Award [0] for simple statement of voltage divided by current

(ii) Ohm's law states that voltage is (directly) proportional to current **or** $\frac{\text{potential difference}}{\text{current}}$ / resistance is a constant;

graph not linear / gradient not constant so Ohm's law not obeyed / calculation of $\frac{V}{I}$ at two points showing that they are different; [2]

Award [0] for bald statement of Ohm's law not obeyed.

(b) (i) (from graph, when $V = 2.8 \text{ V}$), $I = 0.33 \text{ A}$; (accept answers in range 0.32 to 0.34 A)

$R = \frac{V}{I} = \frac{2.8}{0.34} = 8.5 \Omega$; (accept answers in range 8.2 to 8.8 Ω) [2]

(ii) $A = \left(\frac{\rho l}{R} = \frac{5.8 \times 10^{-7} \times 0.40}{8.5} \right) 2.7 \times 10^{-8}$;

(accept answers in range 2.6 to 2.8 $\times 10^{-8}$)

$r = \sqrt{\frac{A}{\pi}}$ seen/used;

$= 9.3 \times 10^{-5} \text{ m}$; (accept answers in range 9.2 to 9.5 $\times 10^{-5}$) [3]

(c) each lamp has a potential difference of 3.0 V so current equals 0.35 A; (accept answers in range 0.34 to 0.35 A)

2.1 W; (accept answers in range 2.0 to 2.1 W) [2]

Award [1] for answers that use voltage 6.0 V with current 0.52 A to get $P = 3.1 \text{ W}$.